


# Read Text File Action

The Read Text File action enables you to automate the reading of a text file.

You can read the text file into a Automise variable, and also process each line in the OnReadLine event.

On this page:

## Read File

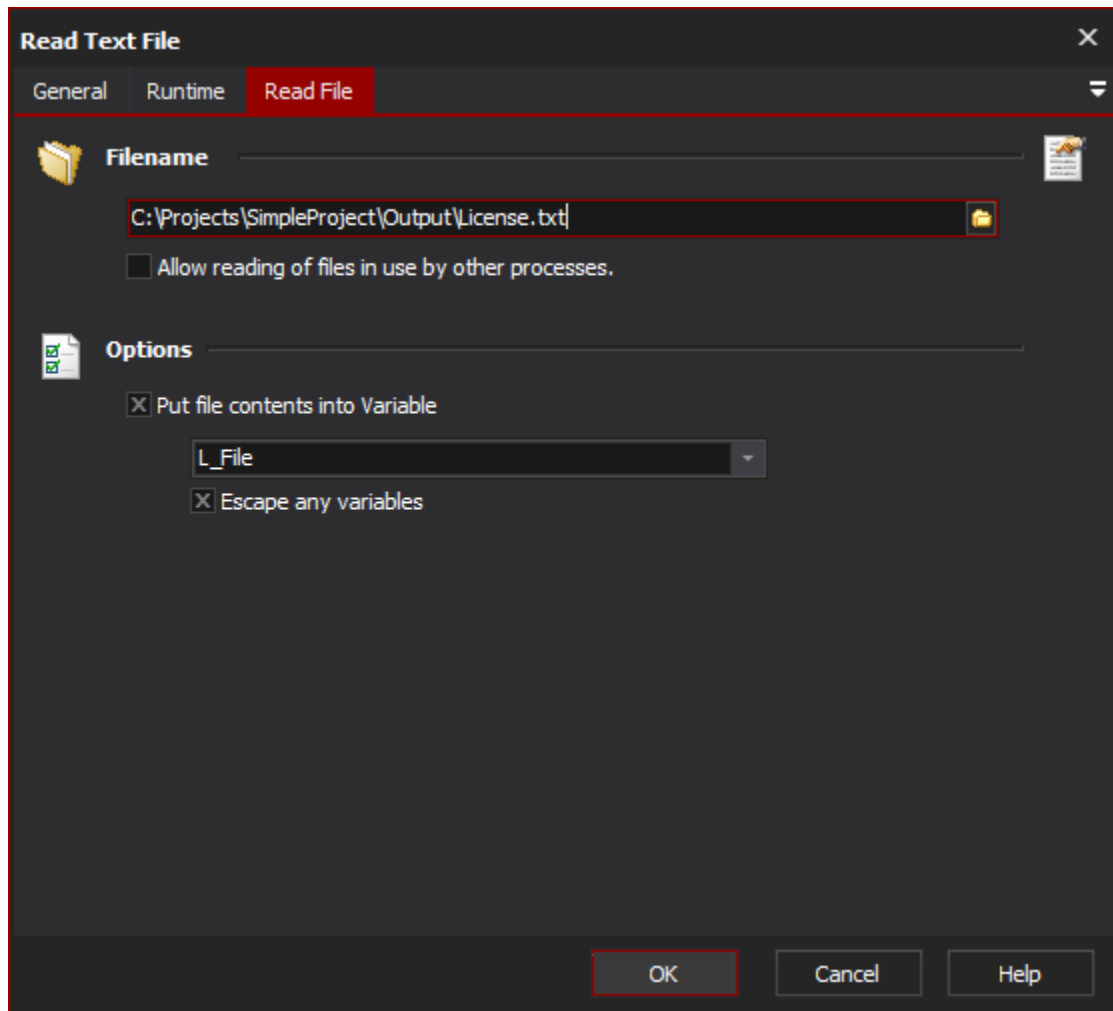

**Read Text File**

General Runtime **Read File**

**Filename**

☐ Allow reading of files in use by other processes.

**Options**

☒ Put file contents into Variable

☒ Escape any variables

OK Cancel Help

### Filename

Specify the name of the text file to read.

### Allow reading of files in use by other processes.

Specify this option so that other processes can still read the text file while the action is.

### Options

#### Put file contents into variable

Specify this option (and a variable) so that you can examine and manipulate the contents of the file in subsequent actions.

When the action executes, the "OnReadLine" event is called for each line of the text file which makes it easy to process the file line-by-line in script.

## Escape any variables

Specify this option to escape any variable references in the source file.

For example, if the source contains % signs then they will be replaced as %%. This means that you can safely use an action which expands variable references in the variable contents, without errors.

## Also See

[Escaping Variable References](#)