

# Actions Reference

## What are Actions?


Actions are the cornerstone of FinalBuilder. FinalBuilder has built in actions to do things such as Copy Files, Move files, run programs etc. In addition, FinalBuilder has actions to interface with a number of third party products such as Embarcadero Delphi, Microsoft Visual Studio, Git and InstallShield Professional.

## Targets


FinalBuilder has one initial Target that you can add actions to. This Target is called "Default". When you are creating your build, you will start off by adding actions to the "Default" Target. See the [target topic](#) for more information.

## Using Actions

To add an action to the Target, select an action from the [Action Types](#) frame (on the left hand side of the main window) by clicking on the action type you wish to add.

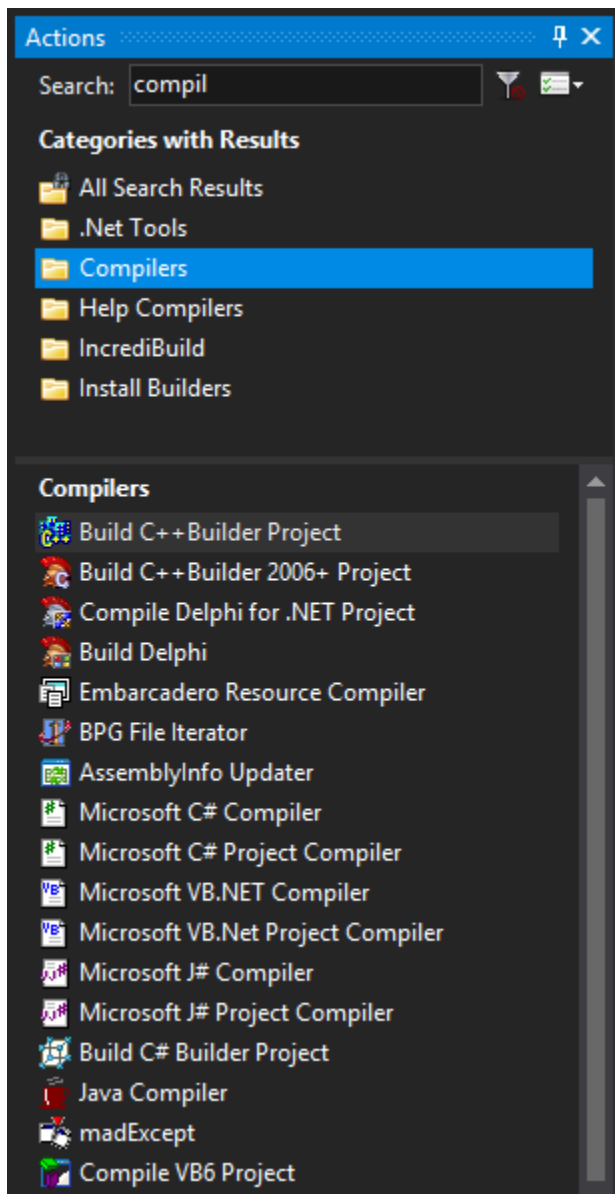

After clicking on the action type, by default the properties dialog will be displayed:

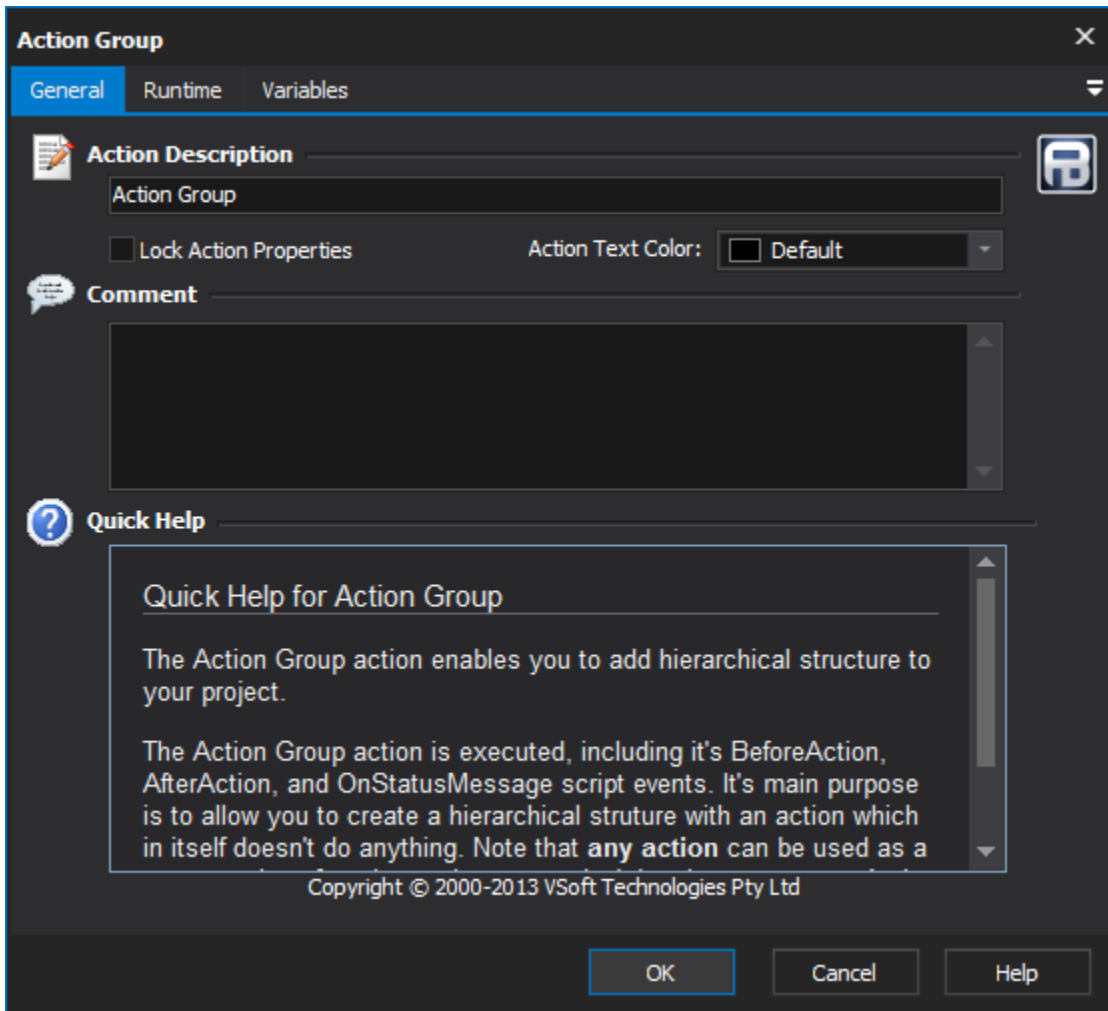

## Properties Tab

All actions have a [common set of properties](#), displayed on the Properties tab. The number of additional tabs in this dialog will depend on which action type you selected.

In addition to the properties window, you can also edit most of each action's properties in the Action Inspector tab.

Properties ↑ ×

**Behaviour**

Enabled	<input checked="" type="checkbox"/>
Ignore Failure	<input type="checkbox"/>
Pause Interval	0
Retry Attempts	0
Retry Pause Interv	1000

**Description**

Comment	
Description	Compile Program

**Identity**

Action Name	ASync Action Group
Package	Core

**Logging**

Action Log Title	Compile Program
Expand Action Log	<input checked="" type="checkbox"/>
Hide Action From L	<input type="checkbox"/>
Log Action Properti	<input type="checkbox"/>
Log To Variable	
Suppress Log Mess	<input type="checkbox"/>

Projects | Actions | **Properties** | Run