


Start, Stop or Restart WWW Service Actions - [IIS 5]

The Start, Stop & Restart WWW Service actions use WMI to start and stop the IIS WWW service (W3SVC) on a server running IIS.

Use the [Server Selection tab](#) to choose the server you wish to administrate.

Each of the actions can be set not to fail if the service is already started/stopped (in the case of the Restart action, the service will be started even if it is initially stopped.)

Server

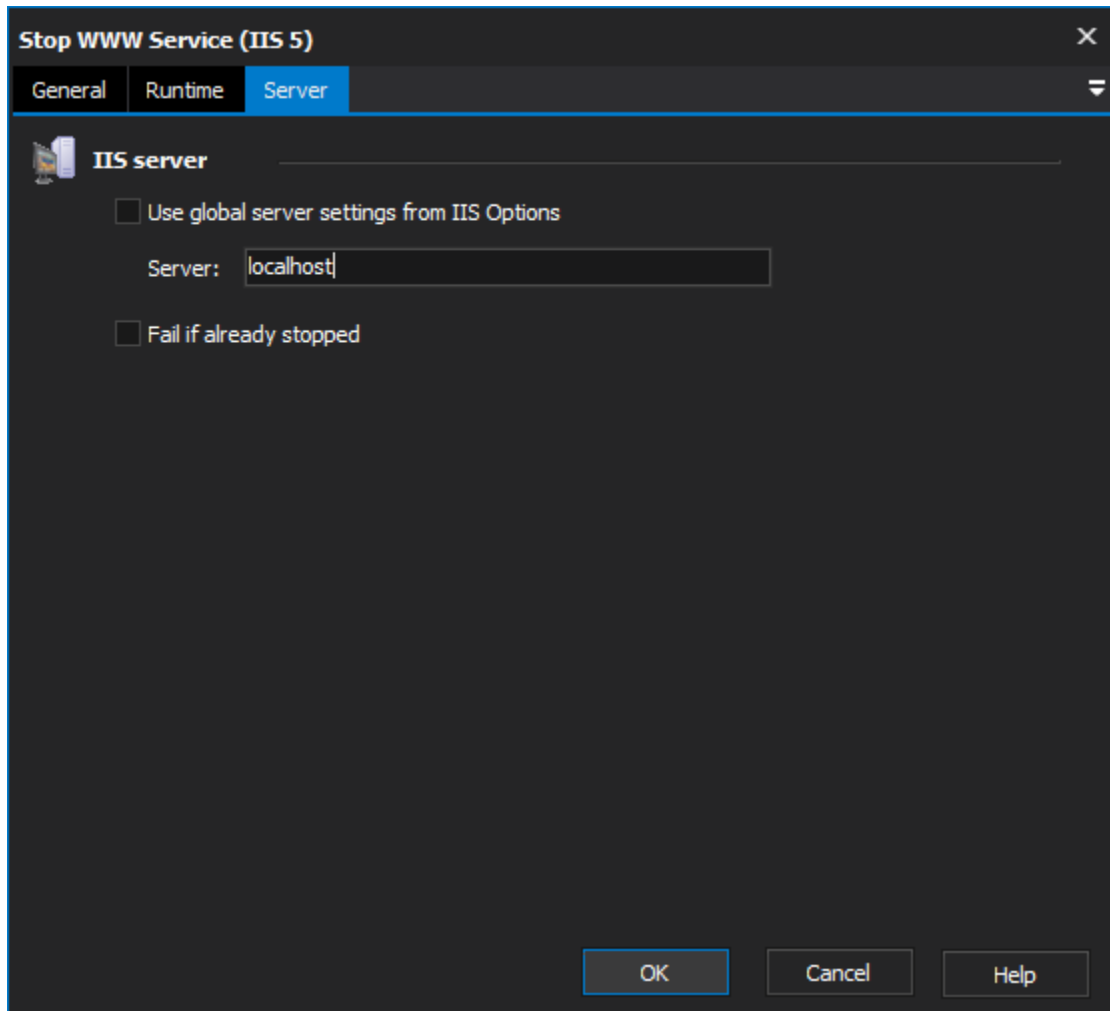

The screenshot shows a Windows-style dialog box titled "Stop WWW Service (IIS 5)". It has three tabs: "General", "Runtime", and "Server", with "Server" currently selected. Below the tabs, there is a section labeled "IIS server" with a server icon. Under this section, there are two checkboxes: "Use global server settings from IIS Options" (unchecked) and "Fail if already stopped" (unchecked). A text field labeled "Server:" contains the value "localhost". At the bottom of the dialog, there are three buttons: "OK", "Cancel", and "Help".

IIS server

Use global server settings from IIS options

Server

Fail if not started / stopped