


Unload IIS Application Action - [IIS 5]

The Unload IIS Application actions allows you unload a given IIS web application from memory.

Server

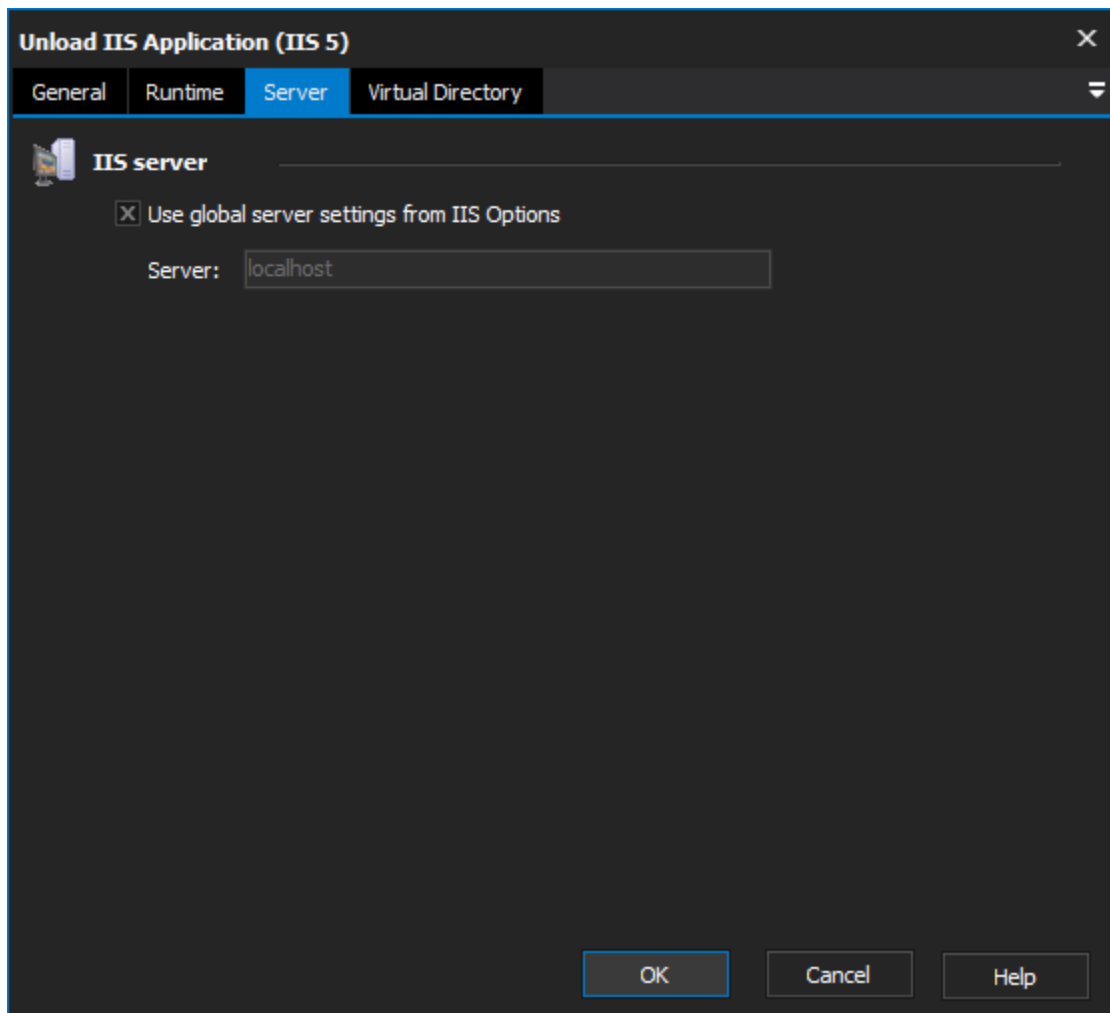

IIS server

Use global server settings from IIS options

Server

Virtual Directory

The screenshot shows a Windows-style dialog box titled "Unload IIS Application (IIS 5)". It has four tabs: "General", "Runtime", "Server", and "Virtual Directory", with the last one being selected. The "Web site" section contains a radio button for "Index" (selected) with a spinner box set to "1", a "Connect and update" button, and a radio button for "Name" with an empty text box and an "Update automatically" checkbox. The "Virtual directory" section has a "Virtual directory:" label above a dropdown menu, and two checkboxes: "Fail if already unloaded" and "Recursive unload". At the bottom are "OK", "Cancel", and "Help" buttons.

Web site

Index

Name

Select a web site, as per the [Website Selection tab](#). Choose "update automatically" to have the virtual directory list automatically update as you change web sites.

Virtual directory

Virtual directory

Choose the virtual directory which hosts the application that you wish to unload. You can set the action not to fail if the application is already unloaded.

Fail if already unloaded

Recurse unload

Select "Recursive Unload" to recursively unload applications in all child directories.