


# Create Website Action - [IIS 7]

The Create Website (IIS 7) actions allows you to create a new website on an IIS 7 server.

## Server

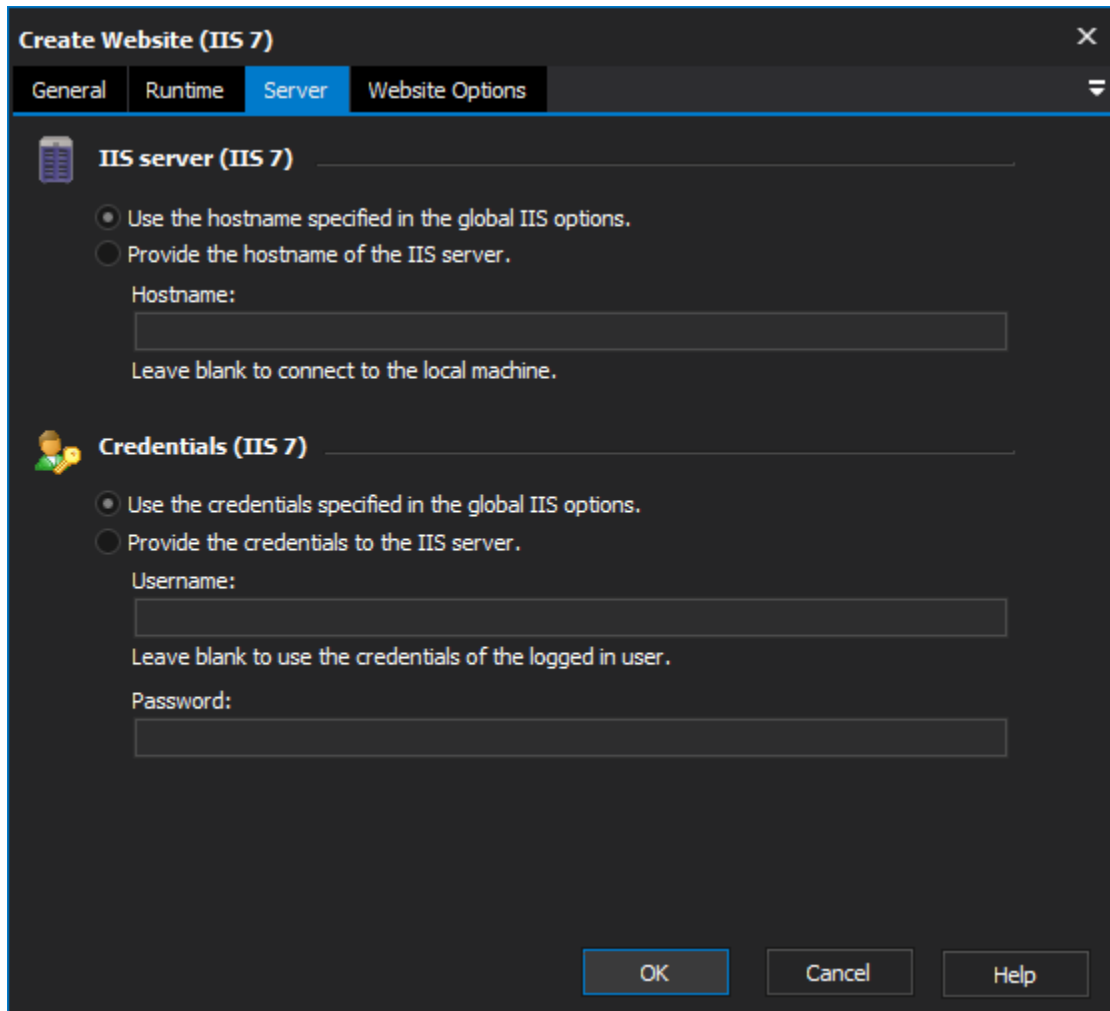

The screenshot shows the 'Create Website (IIS 7)' dialog box with the 'Server' tab selected. The dialog has a title bar with a close button (X) and a tab bar with 'General', 'Runtime', 'Server', and 'Website Options'. The 'Server' tab contains two sections: 'IIS server (IIS 7)' and 'Credentials (IIS 7)'. The 'IIS server' section has two radio buttons: 'Use the hostname specified in the global IIS options.' (selected) and 'Provide the hostname of the IIS server.'. Below the radio buttons is a text field labeled 'Hostname:' with a hint 'Leave blank to connect to the local machine.' The 'Credentials' section has two radio buttons: 'Use the credentials specified in the global IIS options.' (selected) and 'Provide the credentials to the IIS server.'. Below the radio buttons are text fields for 'Username:' and 'Password:', with a hint 'Leave blank to use the credentials of the logged in user.' at the bottom. At the bottom of the dialog are 'OK', 'Cancel', and 'Help' buttons.

**Create Website (IIS 7)**

General Runtime **Server** Website Options

**IIS server (IIS 7)**

☒ Use the hostname specified in the global IIS options.  
☐ Provide the hostname of the IIS server.

Hostname:  
[Text Field]  
Leave blank to connect to the local machine.

**Credentials (IIS 7)**

☒ Use the credentials specified in the global IIS options.  
☐ Provide the credentials to the IIS server.

Username:  
[Text Field]  
Leave blank to use the credentials of the logged in user.

Password:  
[Text Field]

OK Cancel Help

## IIS server

Use the hostname specified in the global IIS options

Provide the hostname of the IIS server

## Credentials

Use the credentials specified in the global IIS options

Provide the credentials to the IIS server

Username

Password

## Website Options

**Create Website (IIS 7)**

General Runtime Server **Website Options**

**Website options**

Name  
WikiTesting

Physical path  
C:\LocalData\Wiki\

Application pool (Blank for default)  
[Dropdown]

☐ Start website once created.

☐ Do not fail if website exists

**Website bindings**

IP address  
192.168.12.10

Port  
80

Host header  
[Empty]

OK Cancel Help

## Website options

### Name

The name of the new web site, the name must be unique on the server.

### Physical Path

A fully qualified path of a physical directory to which you want the web site mapped.

### Application pool

#### Start website once created

Determines whether the website will be started once it has been created.

#### Do not fail if website exists

## Website bindings

### IP Address

The IP Address to bind the new web site to, leave blank to bind to all unassigned IP addresses.

### Port

The port which the new website should use. Default is port 80.

**Host Header**

The host header to bind the site to.