


Perforce Options

Specify the global options for all the Perforce actions.

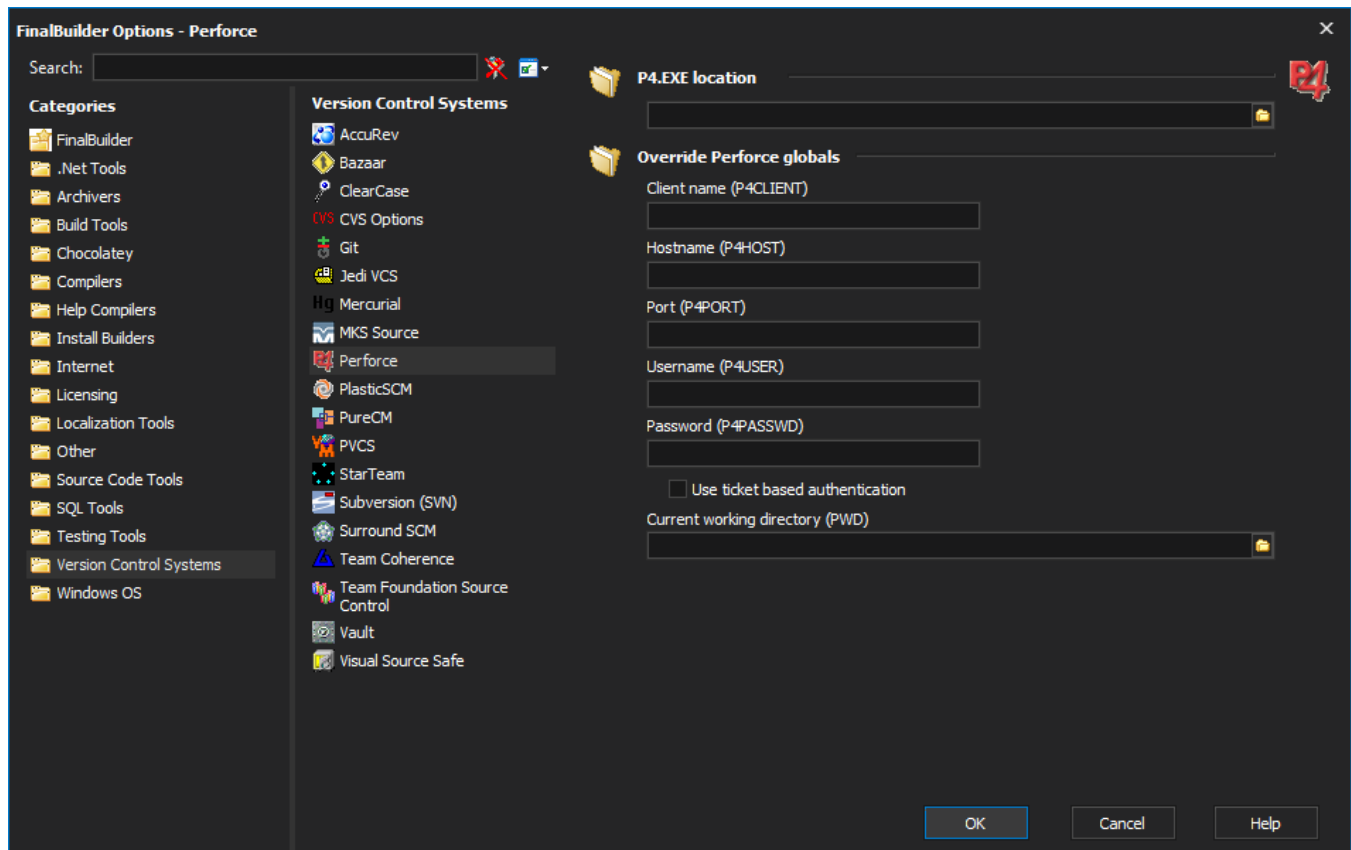

P4.EXE Location: FinalBuilder attempts to detect where Perforce is installed, if this doesn't succeed then specify where FinalBuilder will find P4.exe

Client name (g-opts: -c) : Overrides any P4CLIENT setting with the specified client name.

Hostname (g-opts: -H) : Overrides any P4HOST setting and replaces it with the specified hostname.

Port (g-opts: -p) : Overrides any P4PORT setting with the specified port number.

Username (g-opts: -u) : Overrides any P4USER, USER, or USERNAME setting with the specified user name.

Password (g-opts: -P) : Overrides any P4PASSWD setting with the specified password.

Current Working Directory (g-opts: -d) : Overrides any PWD setting (i.e. current working directory) and replaces it with the specified directory.