

Create FTP Directory Action - [IIS 6]

[Automise Professional Edition]

Server

Create IIS 6 FTP Directory

General


Runtime

Server

FTP Site


New Virtual Directory

Permissions

 **IIS server**

☒ Use global server settings from IIS FTP options

Server:

 **Authentication**

☒ Use global credentials from IIS Options

☐ Use these credentials:

User name:

Password:

(Leave both blank to use current Windows authentication)

OK

Cancel

Help

IIS Server

Use global server settings from IIS FTP options

Server

Authentication

Use global credentials from IIS options

Use these credentials

Username

Password

FTP Site

Create IIS 6 FTP Directory

General


Runtime

Server

FTP Site

New Virtual Directory

Permissions

 FTP site

☐

Index:

1

☒

Name:

wikiImages

Connect and update

OK

Cancel

Help

FTP Site

Index

Name

New Virtual Directory

The screenshot shows the 'Create IIS 6 FTP Directory' dialog box with the 'New Virtual Directory' tab selected. The dialog has a title bar with a close button (X) and a tab bar with 'General', 'Runtime', 'Server', 'FTP Site', 'New Virtual Directory' (highlighted), and 'Permissions'. Below the tab bar, there is a folder icon and the text 'New FTP directory'. The main area contains the following fields and controls:

- Create under:** A dropdown menu showing 'ROOT' and an 'Update list' button.
- Alias:** A text box containing 'WikiImages'.
- Directory:** A text box containing 'C:\LocalData\Wiki\Images' with a folder icon on the right.
- Fail if the directory exists:** A checkbox that is checked, with a small 'X' icon to its left.

At the bottom of the dialog are three buttons: 'OK' (highlighted with a red border), 'Cancel', and 'Help'.

New FTP directory

Create under

Specify an existing IIS FTP Directory to be the parent of the new directory. Click the 'Update list' button to download a list of FTP Virtual Directories from the specified IIS Server.

Alias

Specify the name by which you would like the new directory to be known.


Directory

Specify the local directory for the contents of the new virtual directory.

Fail if the directory exists

If this option is enabled and the directory already exists, the action will fail. Otherwise, the action will edit the properties of the pre-existing virtual directory.

Permissions

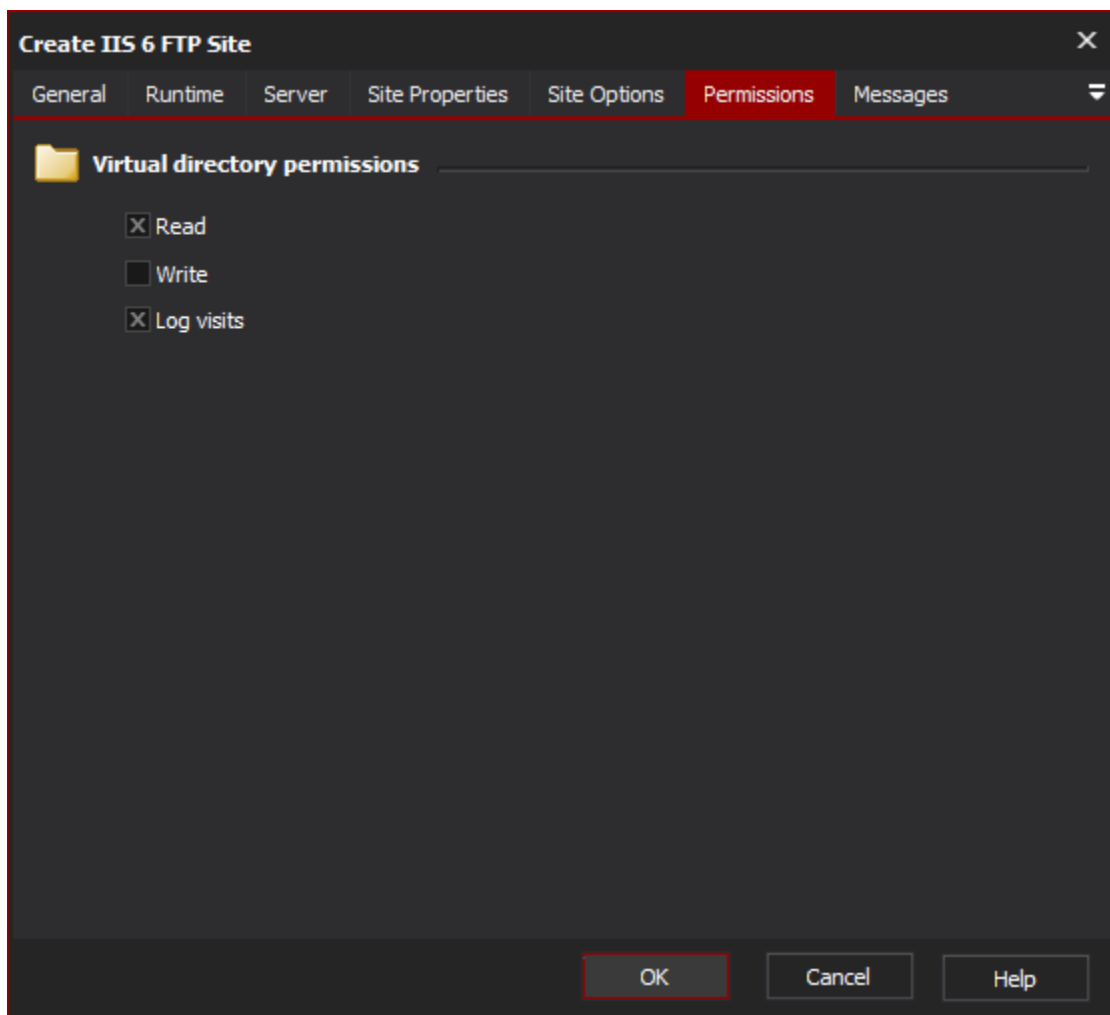

Set the permissions you want FTP users to have on the new Directory.

Set "Log Visits" if you want accesses to the new directory to appear in the IIS Log.

Read

Write

Log visits

Script Events

The Create FTP Directory Action has an extra script event, named `NewDirectory`, which is called once the new directory has been set up. It allows you to set properties which may not be available in the action, or perform more complicated operations on the new directory.

? Unknown Attachment

The `NewIISFtpDir` parameter is an WMI settings object of type `IIsFtpVirtualDirSetting` (see the .)

You can retrieve and set the virtual directory's properties directly using the syntax shown in the above example. See the MSDN Documentation for a full list of available properties. Unfortunately, code completion is not available on this object.

There is no need to call the `.Put_()` method to save any changes which are made (this is done automatically when the event completes.)