
Folder Iterator Action

The Folder Iterator action enables you to repeat a set of actions for one or more folders. Specify a starting folder (eg. c:\temp) and the action will iterate over each folder found inside the starting folder.

Details

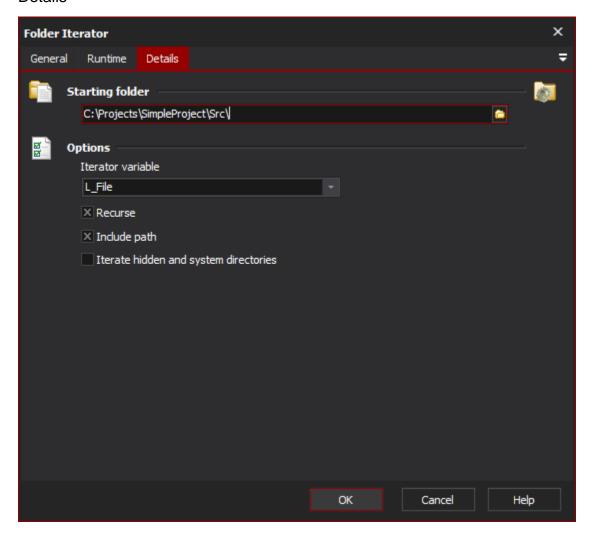

Starting Folder

Enter the root folder to begin the search from.

Options

Iterator variable

Specify the variable for the iterator to set.

Recurse

Select recurse to recurse into subfolders.

Include Path

If this property is set then the variable will be set to the complete path to the folder. Eg. "c:\temp\myfolder", instead of just the folder name ie "myfolder"

Iterate hidden and system directories

Set this option to also include directories marked with the hidden and/or system attributes.