


_Inc_Robocopy_Settings

Settings

The settings page allows you to set the basic details of the Robocopy operation including the source and destination for the operation.

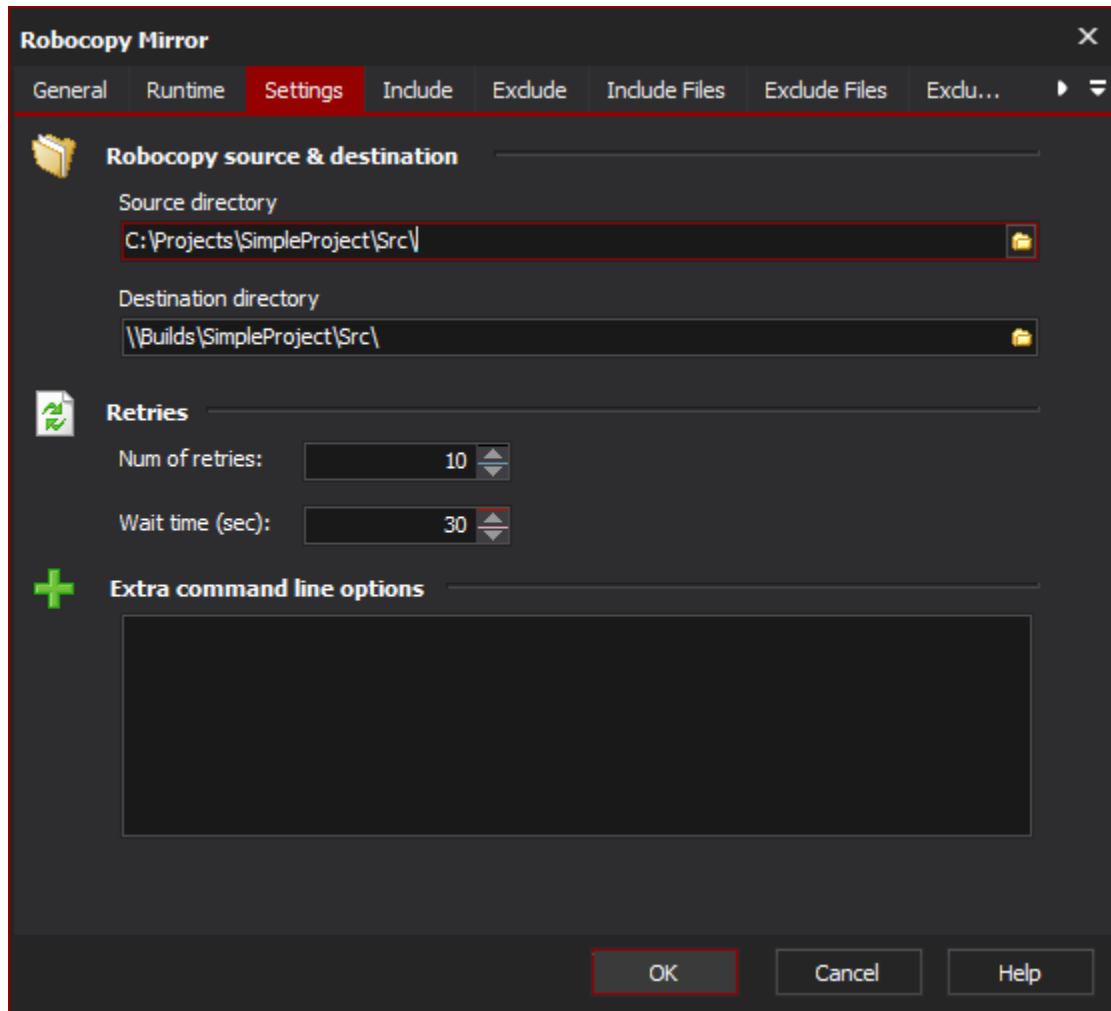

The image shows the 'Robocopy Mirror' settings dialog box. It has a title bar with a close button (X). Below the title bar is a tabbed interface with tabs for 'General', 'Runtime', 'Settings' (which is selected and highlighted in red), 'Include', 'Exclude', 'Include Files', 'Exclude Files', and 'Exclu...'. The 'Settings' tab contains three sections: 1. 'Robocopy source & destination' with a folder icon, containing 'Source directory' (C:\Projects\SimpleProject\Src\) and 'Destination directory' (\\Builds\SimpleProject\Src\), both with folder selection buttons. 2. 'Retries' with a refresh icon, containing 'Num of retries' (10) and 'Wait time (sec)' (30), both with spinners. 3. 'Extra command line options' with a plus icon and a large text area. At the bottom are 'OK', 'Cancel', and 'Help' buttons.

Robocopy Source & Destination

Source Directory

This is the directory that contains the files that you want to copy. Do not specify a file or file mask here.

Destination Directory

This is the directory that will be the destination for the copied files.

Retries

Num of Retries

This allows you to specify the number of times to retry failed copied attempts.

Wait Time (sec)

This allows you to specify the number of seconds between retries of failed copy attempts.

Extra Command Line Options

Specify any additional command line arguments to pass to Robocopy.