

Import XUnit Tests Action

Import XUnit Tests

Import XUnit Tests Action

Import XUnit Tests **Comments**

Name Required Field

Enabled

XML Files 


The path or paths of XUnit output XML files to import.

Fail action if any tests fail

Fail action if any tests error

Ignore warnings

Validate **Save** **Cancel** **Help**

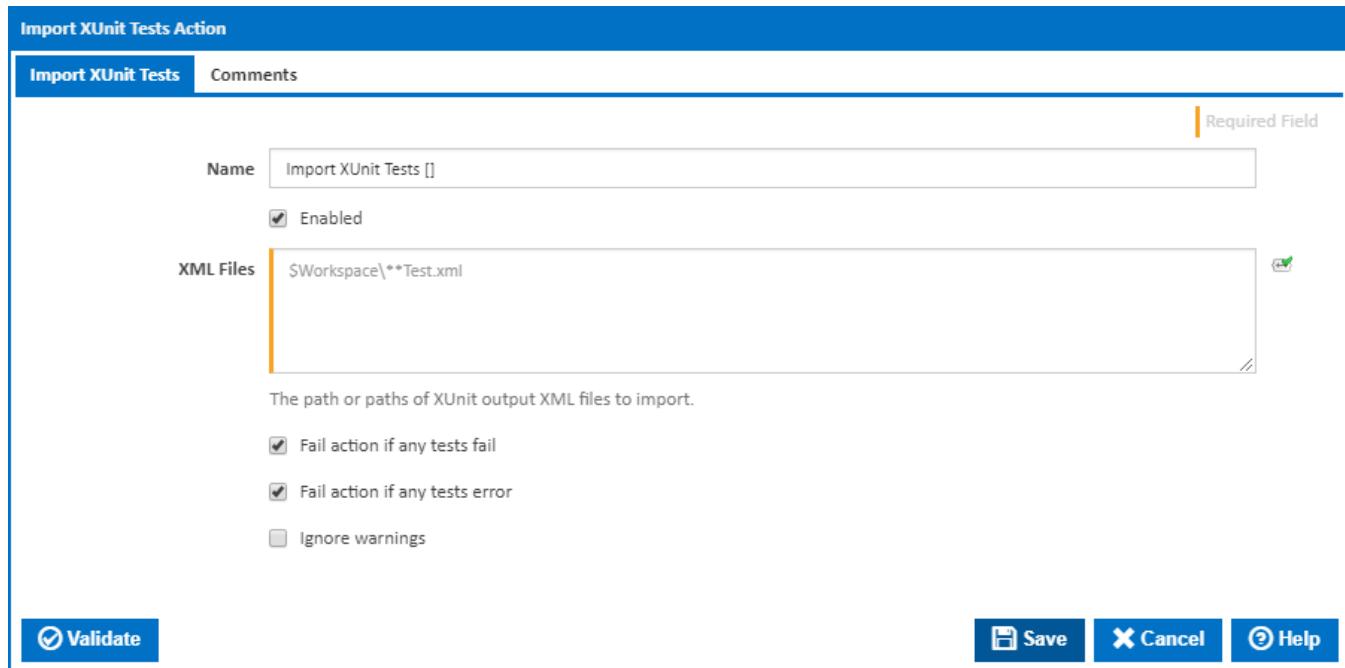

This screenshot shows the configuration dialog for the 'Import XUnit Tests' action. It has tabs for 'Import XUnit Tests' and 'Comments'. The 'Import XUnit Tests' tab is active. The 'Name' field contains 'Import XUnit Tests []'. The 'Enabled' checkbox is checked. The 'XML Files' field contains 'SWorkspace**Test.xml'. Below it is a description: 'The path or paths of XUnit output XML files to import.' There are three checkboxes under 'Fail action if any tests': 'Fail action if any tests fail' (checked), 'Fail action if any tests error' (checked), and 'Ignore warnings' (unchecked). At the bottom are 'Validate', 'Save', 'Cancel', and 'Help' buttons.

Name

A friendly name for this action (will be displayed in the [actions workflow area](#)).

Enabled

Determines if this action will be run within the relevant stage.

XML Files

A list of XUnit test output XML files to import. Each file/pattern must be entered on a new line. You can specify an exact file with its path or you can use pattern matching.

You can exclude files by prefixing the file name or pattern with a dash. e.g -*.ignore. Exclude patterns always take precedence over include patterns.

More information about pattern wild cards can be found on the [Ant Pattern Usage](#) page.

Fail action if any tests fail

Tick this to cause the build to fail if any tests fail.

Fail action if any tests error

Tick this to cause the build to fail if an error occurred while running any test.

Ignore warnings

If this is ticked, any warnings logged will not mark the action with a warning status.