

HTTP Request

The HTTP Request build event handler can be used to call any HTTP endpoint. This can be used to signal other systems when the Continua CI build reaches a certain point or status. You can call any HTTP webhook or endpoint API that suits your needs, such as Slack channel messaging.

The build event handler can be set to automatically respond to any [Build Events](#) in the life-cycle of the build. This allows the HTTP endpoint to be hit at any stage of the build process.

HTTP Request

New Build Event Handler

Build Event Handler

HTTP Request

Authentication

Body

Parameters

Response

When To Run

Options

Conditions

Required Field

Server URL

https://hooks.slack.com

Resource

/services/T21A482SD/CC19QLTB6/kQVwgnJhfpEX1zn1dcXRizM

Method

POST

Data Format

JSON

Authentication Type

Basic

Save

Cancel

Help

Server URL

The URL of the server that the HTTP endpoint to call exists on. Note that the Continua CI server will require access to the server, as it is responsible for running build event handlers. Please make sure that the server is accessible from the machine your Continua CI server is installed on if experiencing any connectivity issues.

Resource

The resource endpoint on the server that is to be requested. Note that this is just the pure path to the endpoint, any query strings can be added later in the query string section.

Method

The method type to use in the request. The available options here are:

- Get
- Post
- Put
- Patch
- Delete

The method should match what the endpoint requires so that the correct action or resource is accessed on the server.

Data Format

The format that the data sent or requested should be presented in. Note that the build event handler will attempt to parse response data in the format selected before extracting any variable values. If this parsing fails, the variable values will not be assigned.

Also some HTTP endpoints require data to be sent in specific format. If the correct format is not used then the endpoint may fail with a Bad Request response. Make sure the data format is set as required by the endpoint in question.

The context-type header will also be set based on the data format selected. For example, when selecting JSON, the context-type header will be set to application/json.

Authentication Type

The type of authentication to use to interact with the specified endpoint. The types of authentication possible are:

- None
- Basic
- NTLM
- Access token as parameter
- Credentials as parameter


The login method to use will be dependent on the endpoint in question. Some endpoints also offer token-based resource paths to alleviate the need to provide credentials.

Use default credentials

Visible only if the 'NTLM' option is selected in the 'Authentication Type' field.

If this ticked, default credentials are used for authentication.

Basic & NTLM Authentication

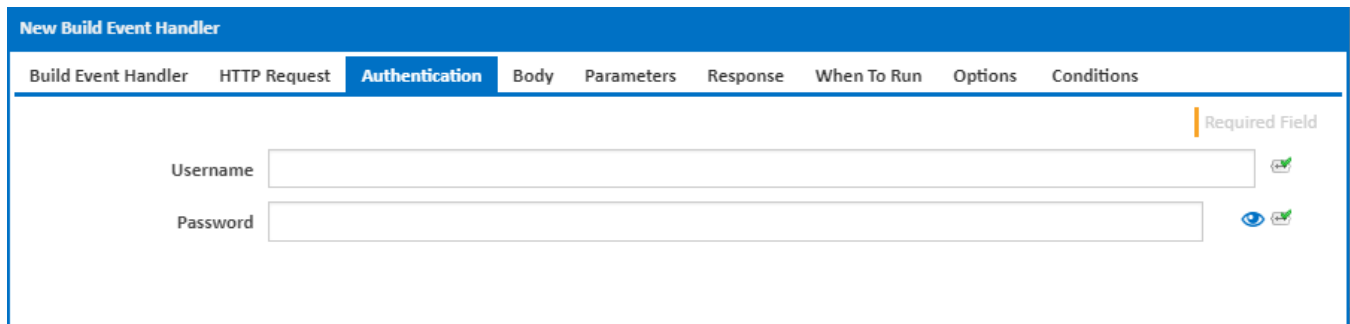

The screenshot shows the 'New Build Event Handler' window with the 'Authentication' tab selected. The 'Username' field is a required field, indicated by an orange bar and the text 'Required Field'. The 'Password' field has a 'Show/Hide' icon (eye) and a 'Copy' icon (document with X) to its right.

Username

The username to use for basic HTTP or NTLM authentication.

Note: The username and password are base64 encoded into a basic authentication HTTP header for the request.

Password

The password to use which matches the username listed above.

Access Token as Parameter Authentication

Edit Build Event Handler

Build Event Handler
Http Request
Authentication
Body
Parameters
Response
When To Run
Options
Conditions

Required Field

Authentication Parameters Type
Header

Access Token Key Name
access_token

Access Token

Authentication Parameters Type

The type of parameter to send the access key token as. The valid values of Cookie, Form, Header, and QueryString determine where the authentication parameter will be placed in the request sent.

Access Token Key Name

The name of the parameter for the token. This can differ for each HTTP service implementation. Check with the service in question as to what the expected parameter name is for the key token.

Access Token

The access token to use for the service. This should match the access level require for the requested service.

Credentials as Parameters Authentication

New Build Event Handler

Build Event Handler
HTTP Request
Authentication
Body
Parameters
Response
When To Run
Options
Conditions

Required Field

Authentication Parameters Type
Header

Username Key Name
username

Username

Password Key Name
password

Password

Authentication Parameters Type

The type of parameter to send the access key token as. The valid values of Cookie, Form, Header, and Query string determine where the authentication parameter will be placed in the request sent.

Username Key Name

The name of the parameter for the username. This can differ for each HTTP service implementation. Check with the service in question as to what the expected parameter name is for the username.

Username

The username of the user accessing the service. This user should have the level of access required to perform the action the HTTP request is asking for.

Password Key Name

The name of the parameter for the password. This can differ for each HTTP service implementation. Check with the service in question as to what the expected parameter name is for the password.

Password

The matching password for the user of the service.

Body

Edit Build Event Handler

Build Event Handler

Http Request

Body

Parameters

Response

When To Run

Options

Conditions

Request Body

Required Field

payload={
 "text": "\$Project.Name\$ is at \$Build.Version\$\nAnd this is another line of text.",
 "icon_emoji": ":ghost:"
}

Request Body

The request body is where the information for the request is placed. In the case above, the request expects a JSON object called payload. The object has two properties called name and icon_emoji - each with values provided for the given request.

The values can have Continua CI variables included in them so that build information can be passed onto other systems. In the above example the text message passed onto the HTTP request includes the project name and build version number.

Parameters

Edit Build Event Handler

Build Event Handler

Http Request

Body

Parameters

Response

When To Run

Options

Conditions

Required Field

Querystring Parameters

POST Parameters

Headers

Add any parameters which you need to send with your request. e.g. accept=application/json

Cookies

Save

Cancel

Help

Query String Parameters

These parameters should be provided in `<name>=<value>` format. Each parameter will be added to the query string which is sent as part of the request. Adding query string parameters here means that you do not have to get the formatting correct for the HTTP query string yourself. All escaping is handled for you when using the Query string parameter entry box.

POST Parameters

Use this to add any get/post parameters to the request. These are simple parameters that the endpoint may require or use to understand the request being made of it. These parameters should be provided in `<name>=<value>` format with each pair on a separate line.

Headers

Allows you to add header parameters to the request. These should be entered in the `<name>=<value>` format with each pair on a separate line.

Cookies

Allows you to add cookie parameters to the request. These should be entered in the `<name>=<value>` format with each pair on a separate line.

Response

Edit Build Event Handler

Build Event Handler

Http Request

Body

Parameters

Response

When To Run

Options

Conditions

Required Field

Stage

Build

Build Event

On Stage Completed

Build Status

Successful

Save

Cancel

Help

Build Event

Select the event which triggers the tag action. You can choose one of the following [Build Events](#):

- On Build Created
- On Before Build Queued
- On Before Build Start
- On After Build Started
- On Before Stage Start
- On Sending Stage To Agent
- On Stage Completed
- On Build Pending Promotion
- On Before Build Continue
- On After Build Continued
- On Build Stopping
- On Build Completed

Stage

For stage events, select the stage this applies to, or "(all stages)" to trigger the tagging action for all stages

Build Status

For "On Stage Completed" and "On Build Completed", you can choose to trigger the tagging action when the build is Successful or has Failed.

Options

Edit Build Event Handler

Build Event Handler

Http Request

Body

Parameters

Response

When To Run

Options

Conditions

Required Field

☒ Follow redirects

Date Format

☒ Wait for result

☐ Ignore errors if existing resource is not found when deleting or updating. Log warning only

☐ Ignore errors if response variable nodes are not found. Log warning only

☒ Fail build on error

☒ Log messages

Save

Cancel

Help

Follow redirects

Clear this option to fail if the HTTP endpoint causes a redirection.

Date Format

Optionally specify the [date time format](#) used in your request body. If you leave this blank the action will attempt to parse various formats in the invariant culture.

Wait for result

Clear this option to run the tagging action in a separate thread if you don't care about the result eg. whether the action fails or not.

Ignore errors if existing resource is not found when deleting or updating. Log warning only

An error result will be returned if a Not Found status code is returned when using DELETE or PATCH methods. Tick this option to ignore these errors, only logging a warning to the build log. This is only available if Wait for result is ticked..

Ignore errors if existing response variable nodes are not found. Log warning only

An error result will be returned if a response variable JSONPath or XPath expression does not match lease with a matching tag name is not found. Tick this option to ignore these errors, only logging a warning to the build log. This is only available if Wait for result is ticked..

Fail build on error

Tick this to fail the build if the operation returns an error or failure. This is only available if Wait for result is ticked.

Log build messages

When this is ticked, Continua CI will add messages to the build log during execution of the HTTP Request build event handler. Build log messages will only be recorded if Wait for Result is ticked.